

LIVE JOBSITE VIEWING. TIME-LAPSE PHOTOGRAPHY. INTELLIGENT SECURITY.

YOUR UNIQUE LOGIN


MOUNTING

POLE MOUNTING The camera and control box ship with pole mounting brackets already attached. You may use the included straps to secure the unit to a pole or similar structure.

WALL MOUNTING The camera may also be mounted to a flat surface such as a wall by removing the pre-attached pole mount. To do so, remove the camera from the base using the included Torx key, then loosen the four screws securing the base to the mounting plate. This will let you access the screws to remove the mounting plate from the pole mount (requires T20 Torx driver, not included). Attach the mounting plate to a wall or other flat surface, reattach the base, then secure the camera to the base. We strongly recommend that only hand tools, no power tools, be used when mounting or adjusting the camera.

AIMING Use the included Torx key to aim your camera as desired.

FINAL PREPARATION Make sure you remove the plastic cover from the camera lens before use.

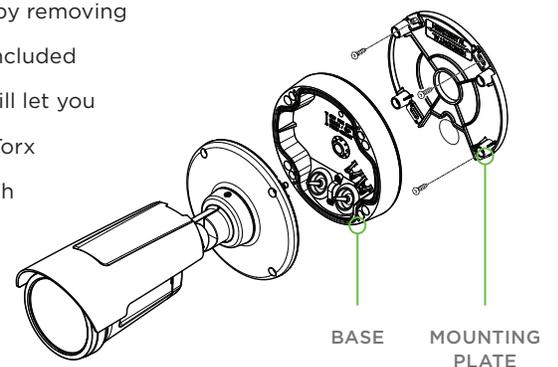

WALL MOUNTING EXPLODED DIAGRAM

19003-05D5

USING THE CABLE COUPLER

The included network cable coupler provides a secure and waterproof connection. Note that the rubber plug comes out of the gland and wraps around your cable. The coupler should only be hand-tightened without the use of any tools.



NETWORK CABLE COUPLER

POWER OPTION 1: USING POE INJECTOR


If your network does not already provide power-over-ethernet, you will need to use the included PoE Injector.

STEP 1: Connect your internet to the injector's "IN" port.

STEP 2: Connect the camera to the injector's "OUT" port.

STEP 3: Power the injector. The injector operates off of 110VAC using the provided power cord.

STEP 4: The camera will come online automatically within 5 minutes. You may use the login provided to check that everything is working or adjust your camera's aim.

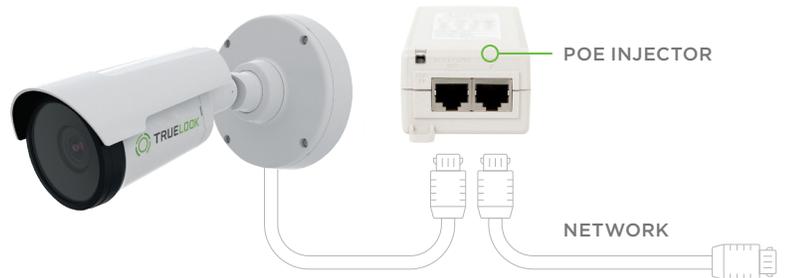

POWER OPTION 2: POE CAPABLE NETWORK

If your network is Class 3 PoE capable, you can simply plug the camera directly into your network. The camera will come online automatically within 5 minutes. You may use the login provided to check that everything is working or adjust your camera's aim.



TRUELOOK SUPPORT Your purchase of this TrueLook system includes customer and technical support. If you have any questions regarding the use or configuration of this equipment and software, please don't hesitate to contact us.

Phone: 866.811.2321

Email: SUPPORT@TRUELOOK.COM